




**Fiberglass Lining
Plastic Coating
External Wrapping
Threading Services
Field Services
Pipe Services**

AP TAN

7812 West Hwy 80 • Midland, TX 79706 • 432.617.0242 • 432.617.0244 Fax

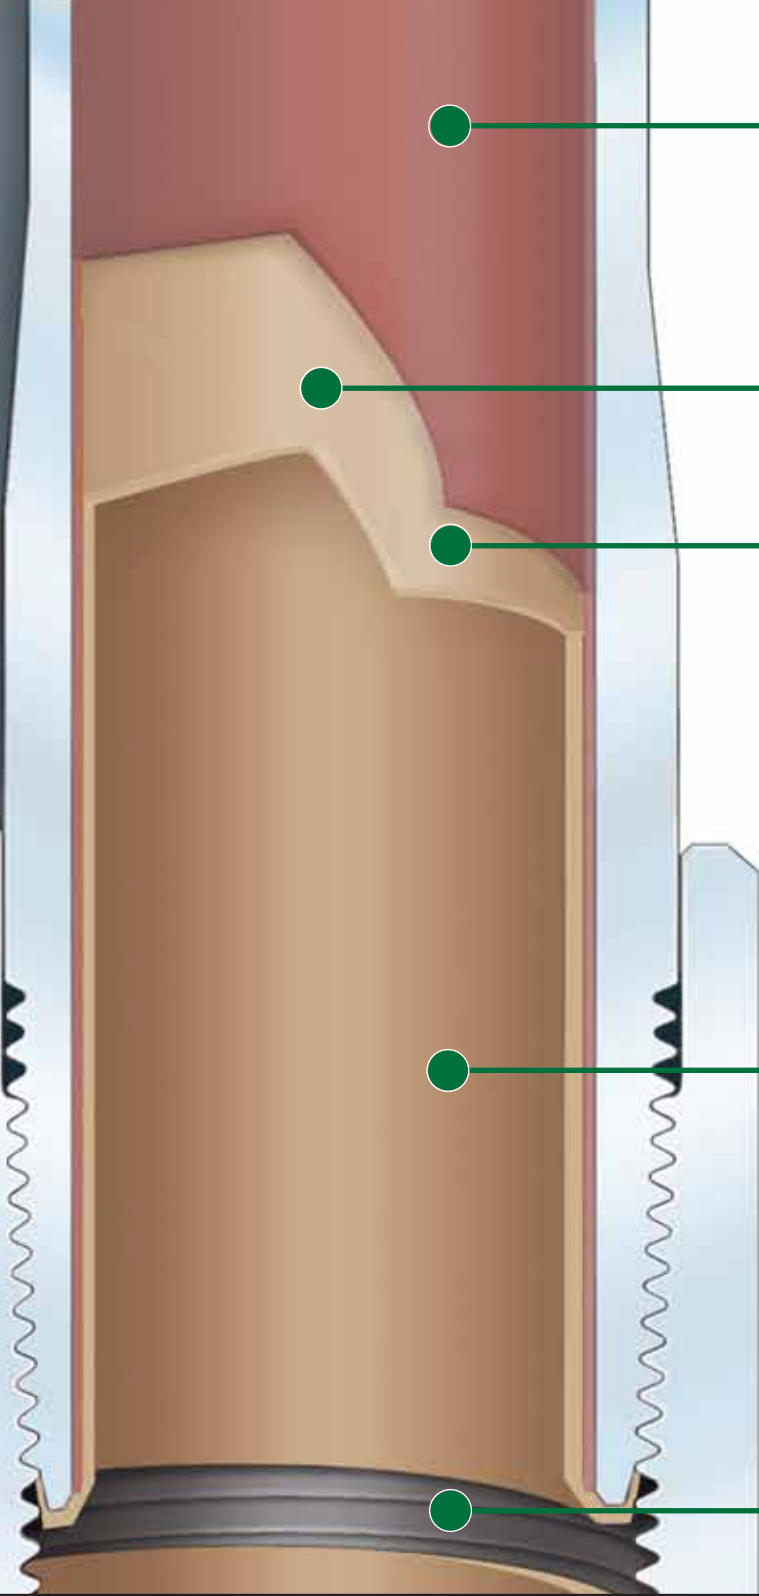

PRIMED AND COATED

Epoxy based ID coating.

ECONOMY AND PERFORMANCE

Best option for low cost operation. Designed to extend tubing life.

CHEMICAL RESISTANCE

Proven protection against high chloride disposal fluids.

CONTINUOUS PROTECTION

Coated in coupling to protect the "J" area.

AP TAN

ID Coating for Tubing and Casing

Product Information

TYPE	Epoxy Powder with Primer
MAX TEMPERATURE	225° F
APPLIED THICKNESS	.010” to .020”
PRESSURE	Up to yield strength of the pipe
PRIMARY SERVICE	CO ₂ , SWD, Oil and Gas injection and production service
PRIMARY APPLICATION	Production tubing and casing
LIMITATIONS	Caution should be used in applications involving H ₂ S in concentrations higher than 0.5%

Nominal Dimensions

2 3/8 4.7		2 7/8 6.5		3 1/2 9.3		4 1/2 11.6	
Nominal Thickness	Nominal Drift	Nominal Thickness	Nominal Drift	Nominal Thickness	Nominal Drift	Nominal Thickness	Nominal Drift
.010”-.020”	1.866”	.010”-.020”	2.312”	.010”-.020”	2.832”	.010”-.020”	3.840”

Improved Flow Efficiency

AP Tan internal plastic coating provides a smooth friction-reduced surface to increase the flowing efficiency of produced or injected gases and fluids.