




**Fiberglass Lining
Plastic Coating
External Wrapping
Threading Services
Field Services
Pipe Services**

GlassWrap® EXTERNAL WRAP

7812 West Hwy 80 • Midland, TX 79706 • 432.617.0242 • 432.617.0244 Fax

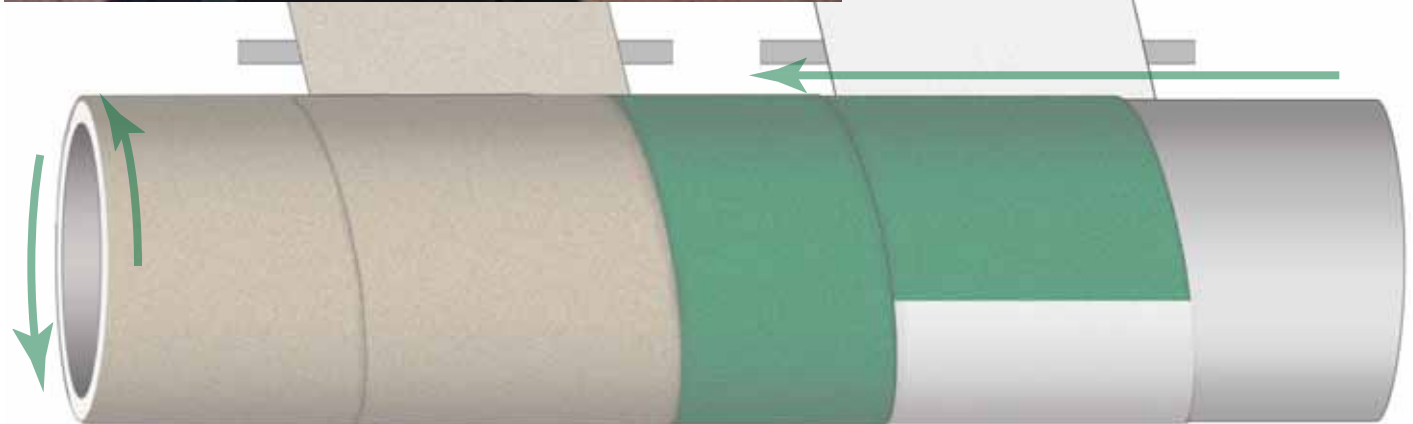

Operating Environment

Test Temperature:	275°F
Test Pressure:	1050 psig
Gas Phase:	14 mol % CO ₂ 1.0 mol % H ₂ S Balance CH ₄
Aqueous Phase:	30 g/L NaCl
Test Duration:	168 hrs.

NACE TM - 01- 85

GlassWrap® Nominal Thickness (mils)

	Pipe Body	Pin End/Cplg
Tubing	20	35
Casing	40	55

For Oilfield Tubulars and Line Pipe to 9 5/8-in

- **Durable External Protection**
for oilfield tubulars and line pipe
- **Proven Technology**
prevents OD corrosion in extreme environments
- **Hardened Epoxy Wrap**
outperforms less durable alternatives
- **Proven CLS Service and Support**
crossing all product lines